



flowboost[®]

Flowboost BASE S.K.H Range
Twin and Three Pump
Horizontal Booster Sets

DATA SHEET

First Publication Date: 01/11/2021

Revision: v2

Revision Date: 01/07/2022

Flowboost BASE S.K Range Twin & Three Pump Horizontal & Vertical Booster Sets



The Flowboost BASE Range is a Variable Speed Booster Set manufactured with Regulation 4/WRAS Approved horizontal multi-stage pumps and water cooled discharge mounted variable speed inverter drives with a vast array of features from the digital display, and available in single, twin and three pump configuration.

Suitable for domestic and commercial use.
Fully wired and tested.



- Regulation 4 / WRAS Approved stainless steel horizontal multi-stage pumps
- Regulation 4 / WRAS Approved isolating valves and non return valves
- Regulation 4 / WRAS Approved flow through valve and anti cycle vessel arrangement
- Stainless steel suction and discharge manifolds and fittings Food Grade
- Suitable for a 1 phase 230 volt supply only
- Water Cooled In Line Inverter
- Robust steel powder coated base, compact size
- Soft start of the pump motor resulting in energy saving
- Power supply under and over voltage display
- Digital operation/error status signalling via LED's and on screen alerts display
- Efficient leakage monitoring to protect pumps in the event of repeated starts
- Fitted module for Low water level facility and BMS Volt free contacts (NO - on fault only)
- Intelligent overload cut out to increase longevity of inverters
- Low Water Level Protection
- Flowcare 2 Year 24/7 response warranty available if commissioned by Flowtech

DETAILED OVERVIEW



Electrical Panel

Comes with individual MCB circuit breaker per pump. Individual and common volt free contact connections. Low water level contacts



Water Cooled Inverter

Digital operation/error status signalling via LED's and on screen alerts display



Flow Through Anti Cycle Vessel

12 litre anti cycle vessel per pump complete with flow through valve




Regulation 4 Pumps

AISI 304 Stainless Steel Horizontal Multi-stage Pumps

Twin Pump Models & Dimensions

MODEL	Kw Per Pump	F.L.C. AMPS Per Pump	Suction DN1	Discharge DN2	A WIDTH mm	B DEPTH mm	C HEIGHT mm
flowboost BASE 2V.S.K.H.1.3005	0.75	2.7	2" BSP	1 ½" BSP	625	700	1250
flowboost BASE 2V.S.K.H.1.3007	1.1	3.6	2" BSP	1 ½" BSP	625	700	1250
flowboost BASE 2V.S.K.H.1.5004	1.5	3.2	2" BSP	1 ½" BSP	625	700	1250
flowboost BASE 2V.S.K.H.1.5005	1.1	3.7	2" BSP	1 ½" BSP	625	700	1250
flowboost BASE 2V.S.K.H.1.5006	1.1	5	2" BSP	1 ½" BSP	625	700	1250
flowboost BASE 2V.S.K.H.1.5007	1.5	5.5	2" BSP	1 ½" BSP	625	700	1250
flowboost BASE 2V.S.K.H.1.9004	1.5	5.5	2 ½" BSP	2" BSP	625	700	1250
flowboost BASE 2V.S.K.H.1.9005	2.2	7.1	2 ½" BSP	2" BSP	625	700	1250
flowboost BASE 2V.S.K.H.1.9006	2.2	8.2	2 ½" BSP	2" BSP	625	700	1250


* AV Mounts add 30mm to the height of the booster set

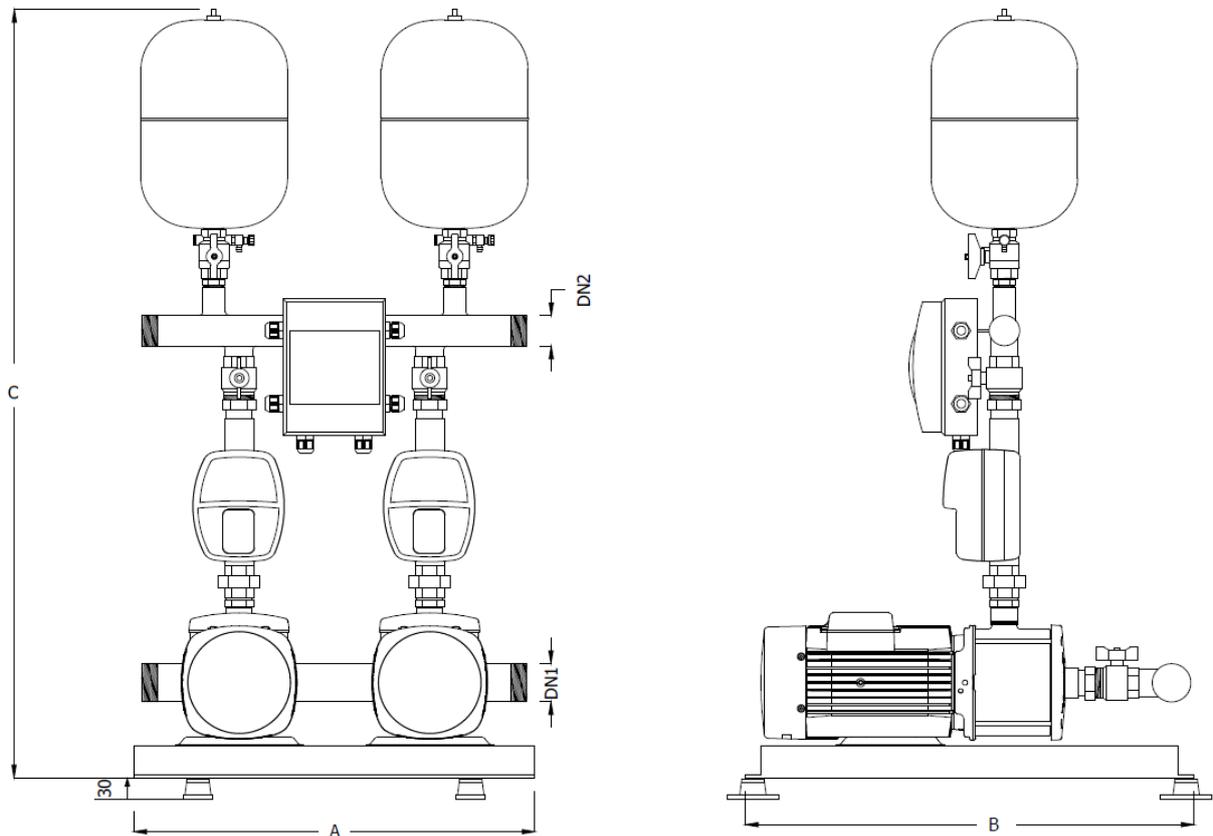


Three Pump Models & Dimensions

MODEL	Kw Per Pump	F.L.C. AMPS Per Pump	Suction DN1	Discharge DN2	A WIDTH mm	B DEPTH mm	C HEIGHT mm
flowboost BASE 3V.S.K.H.1.3005	0.75	2.7	2 ½" BSP	2" BSP	1000	700	1250
flowboost BASE 3V.S.K.H.1.3007	1.1	3.6	2 ½" BSP	2" BSP	1000	700	1250
flowboost BASE 3V.S.K.H.1.5004	1.5	3.2	2 ½" BSP	2" BSP	1000	700	1250
flowboost BASE 3V.S.K.H.1.5005	1.1	3.7	2 ½" BSP	2" BSP	1000	700	1250
flowboost BASE 3V.S.K.H.1.5006	1.1	5	2 ½" BSP	2" BSP	1000	700	1250
flowboost BASE 3V.S.K.H.1.5007	1.5	5.5	2 ½" BSP	2" BSP	1000	700	1250
flowboost BASE 3V.S.K.H.1.9004	1.5	5.5	3" BSP	2 ½" BSP	1000	700	1250
flowboost BASE 3V.S.K.H.1.9005	2.2	7.1	3" BSP	2 ½" BSP	1000	700	1250
flowboost BASE 3V.S.K.H.1.9006	2.2	8.2	3" BSP	2 ½" BSP	1000	700	1250


* AV Mounts add 30mm to the height of the booster set

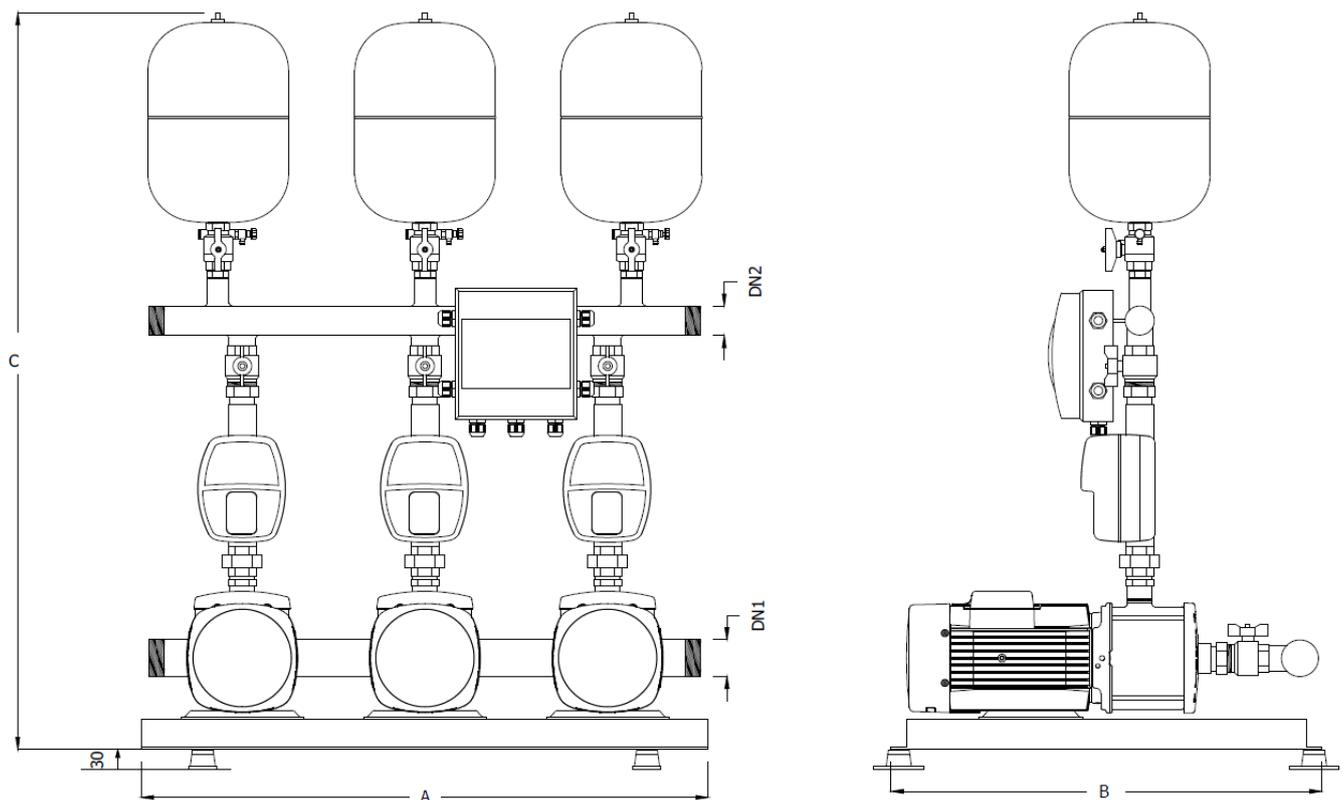


Performance Curve - 3 Range

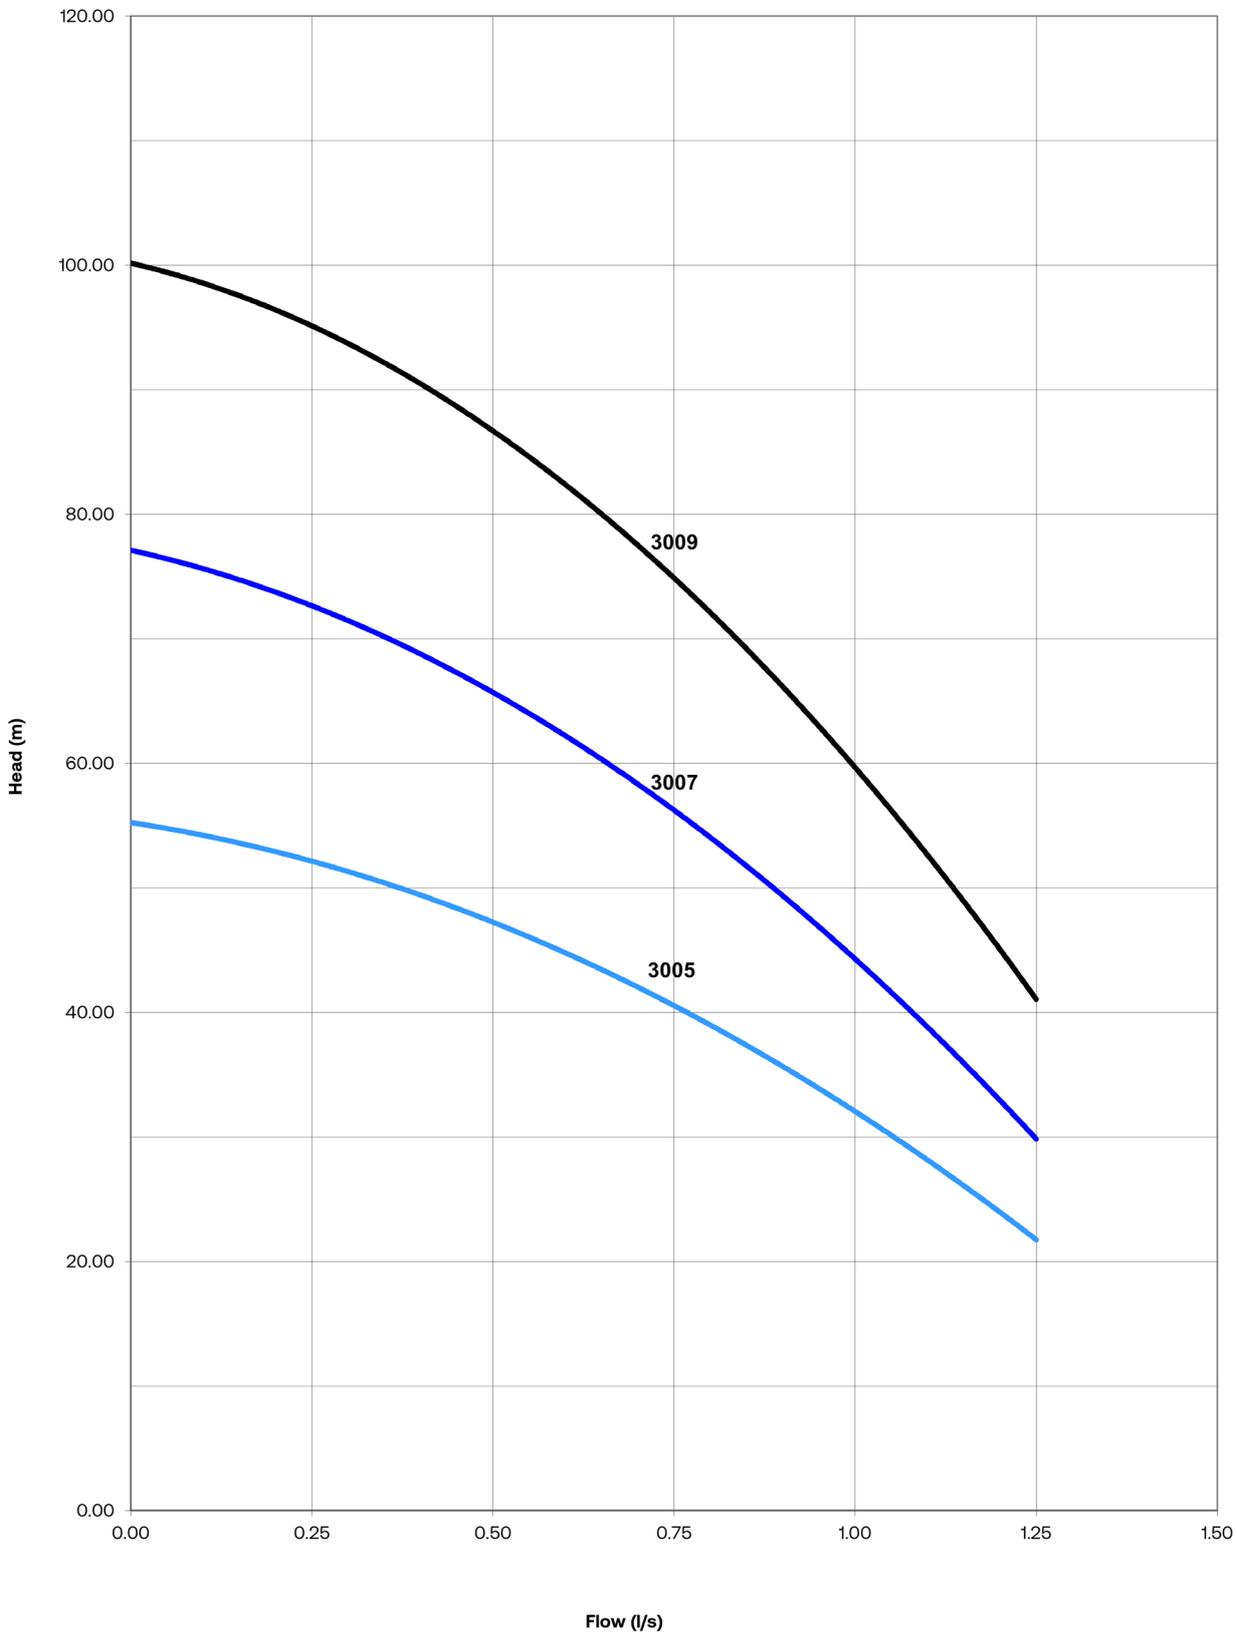

Performance Curve - 5 Range

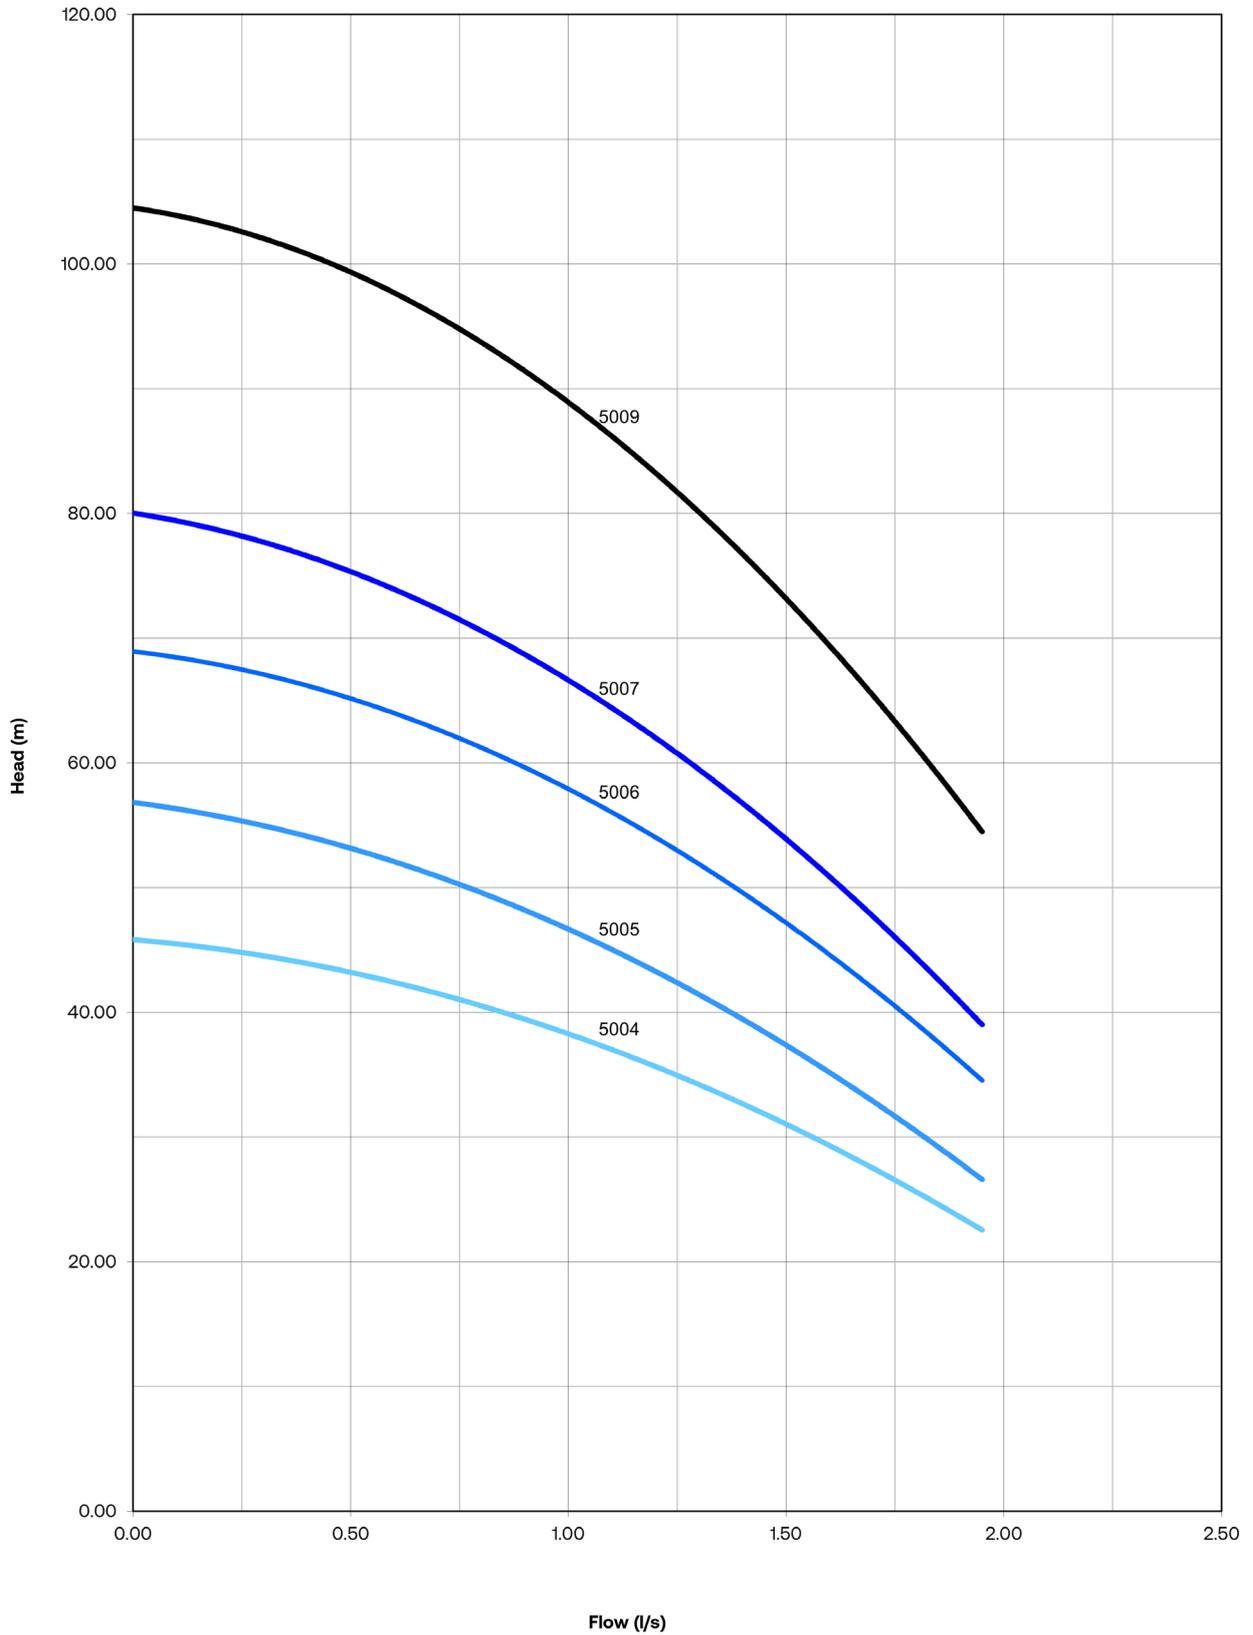

Performance Curve - 9 Range

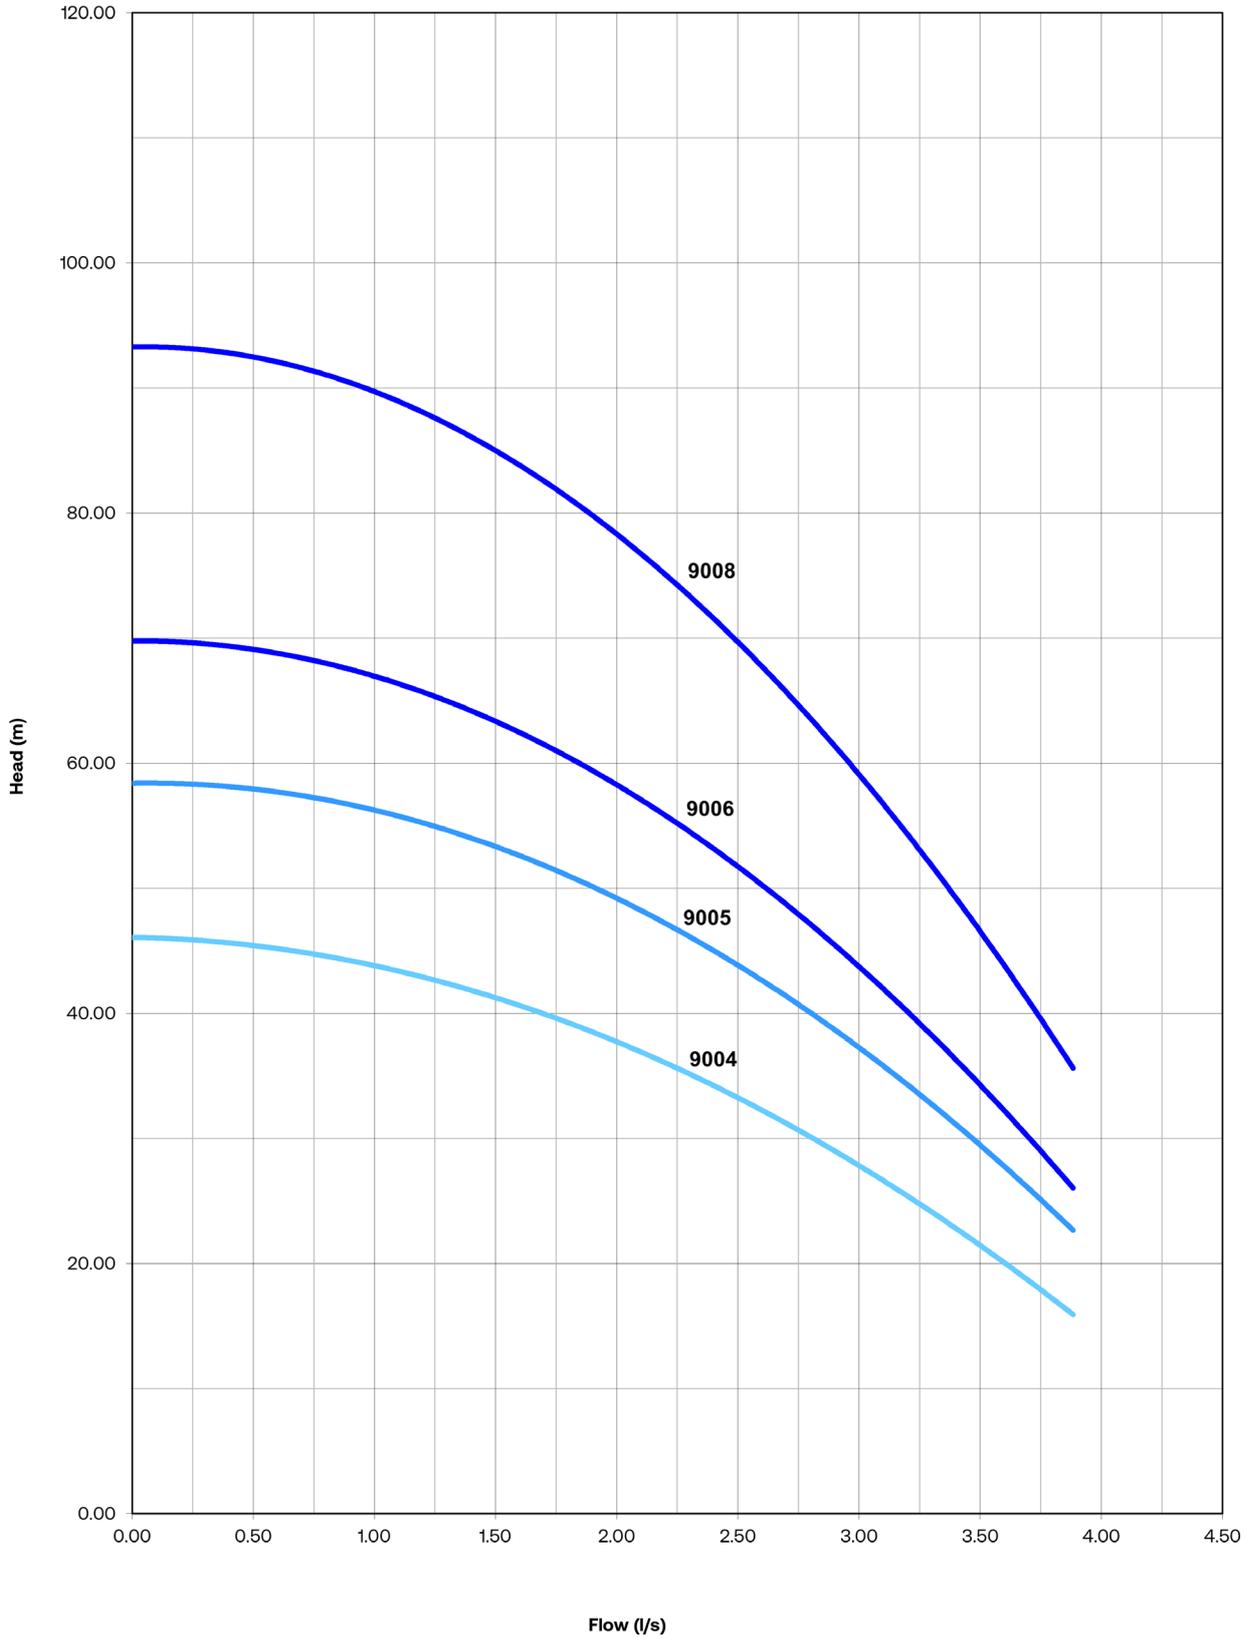

OPTIONAL EXTRAS



Suction and Discharge Valve Kits

Suction and discharge isolating valve kits to aid in servicing and commissioning



Stainless Steel Flexible Connectors

Designed for installation on vibrating equipment to reduce the transmission of noise and vibration. WRAS Approved.



Anti Vibration Mounts

Flowmount anti vibration mounts for the base to reduce vibrations



Flowsafe Float Switch

5 or 10m float switch to provide low water protection and protect pumps from dry running in the event of mains water interruption

flowzone[®]

MEMBERS AREA

This section of the **flowtech**[®] website holds information exclusively for members. Members will need to log in to gain access to these pages.

Our member's will be granted exclusive access to our technical resource library. Within this resource is a wide range of product information including data sheets, technical drawings, O&M Manuals and training videos



flowcare[®]

AFTER SALES SERVICE

At **flowtech**[®] we operate a network of Service Engineers located throughout the UK who are supported by our offices located in Greater Manchester. The distribution of engineers means that in the majority of cases we are less than 4 hours away from attending a customer call out.

We place great emphasis on providing technical back up to support our Service Engineers in resolving some difficult operational and technical issues. We pride ourselves on completing a project on time, within budget and never leaving a problem unresolved, or a customer waiting. This quality of service has made us the first choice for our customers.

FOR FURTHER INFORMATION OR ASSISTANCE

contact us

Flowtech Water Solutions are experts in water services and water booster sets. We have continuously supplied a wide range of standard and custom products since being founded in 1996.

MANUFACTURE & SUPPLY

TELEPHONE : 0333 200 1756

EMAIL: info@flowtech.org.uk

SERVICE & MAINTENANCE

TELEPHONE : 0333 200 1813

EMAIL: service@flowtech.org.uk

WEBSITE: www.flowtech.org.uk

ADDRESS : Unit 1 Lock Flight Buildings, Wheatlea Industrial Estate,
Wigan, Greater Manchester WN3 6XP United Kingdom

