

AH1-0303-007-M

Product Description

The Flowtech AH1-0303-007-M booster set utilises WRAS approved components and features a stainless steel multistage pump mounted on a galvanised steel base plate. The pump is operated by our advanced variable speed controller and will deliver a nominal flow rate of 5.6 m³/h (Per Pump) and nominal head pressure of up to 30.5 metres.


Certifications	- Fully WRAS Approved - Kiwa Regulation 4 Approved - UKCA Approved - CE Approved
Control Panel	- Variable speed pump control - Volt free contacts - Dry run protection
Features	304/316 Stainless steel manifold assembly - Suitable for a single phase 230 volt supply - Air cooled inverter - External low water level facility - Pressure vessel with flow through isolation & drain valve - Robust steel powder coated base, compact size - AV mounts & Flexible connectors optional 2 Year Warranty - Minimum pressure alarm - Safety start (slow fill mode)



Specification

Suction connection	2 BSP
Delivery connection	1 ½ BSP
Max operating flow (per pump)	1.6 l/s
Max operating pressure	3.0 bar
Closed valve pressure	3.3 bar
Maximum system pressure rating	10 bar
Speed	Variable
IP rating	IP55
Motor power	0.75 kW
Weight	TBC
Pressure vessels N° x [Litres]	1 x [8]
Maximum system temperature	23 °C

Pump Performance Curve

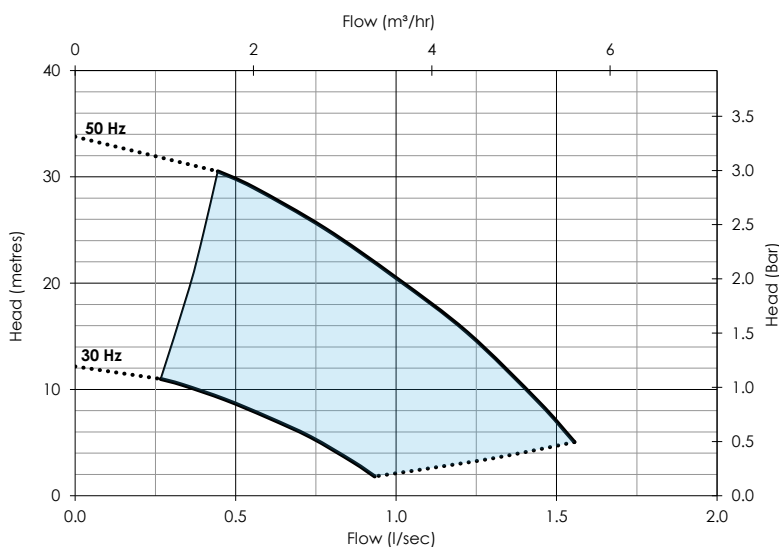

Losses in fittings and valves not included.

Performances shown are for S.G. 1.0 water with a liquid temperature during operation of 20 °C

Pumps are tested in accordance with BS EN ISO 9906:2012 Rotodynamic pumps - Hydraulic performance acceptance tests - Grade 3B (ISO 9906:2012)

Flowtech Ltd is not liable for any incompleteness or inaccuracies. Specifications and illustrations are subject to revision without notice.

flowtech

Electrical Data


Operating speed range	30 - 50Hz
Total Current @ Full Load	4.6 A
Supply Voltage	230v
Electrical Phase	1Φ

Model Codes

AH1-0303-007-M

Range	
# of Pumps	
BEP Flowrate (m³/h)	
Pump Stages	
Motor size	
Power Supply	

Technical Drawing

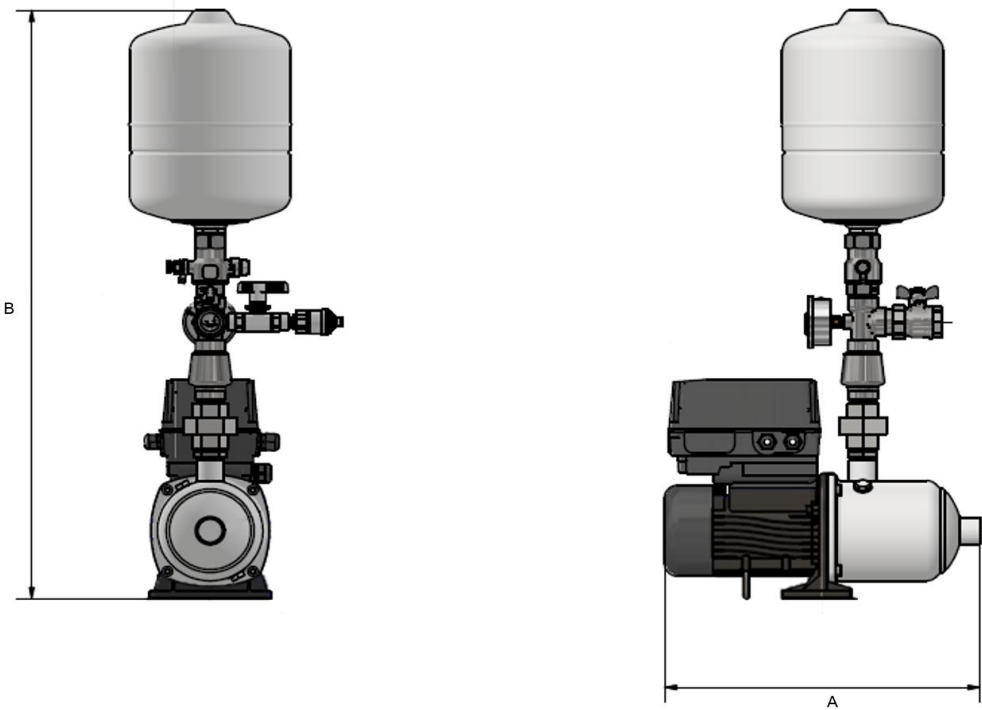

Drawing dimensions

Dimension A	506
Dimension B	1000

