
#### AH2-0904-015-M

#### **Product Description**

The Flowtech AH2-0904-015-M booster set utilises WRAS approved components and features 2 stainless steel multistage pumps mounted on a galvanised steel base plate. The pumps are operated by our advanced variable speed controller and will deliver a nominal flow rate of 14.0 m³/h (Per Pump) and nominal head pressure of up to 44.2 metres.

ns	•	Fully WRAS Approved			
Certifications	•	Kiwa Regulation 4 Approved			
	•	UKCA Approved			
	•	CE Approved			
e	•	Variable speed pumps control			
Control Panel	•	Volt free contacts			
	•	Dry run protection			
Cor	•	Duty-assist and duty-standby modes			
	•	304/316 Stainless steel manifold assembly			
	•	Suitable for a single phase 230 volt supply			
	•	Air cooled inverters			
	•	External low water level facility			
Ires	•	Pressure vessel with flow through isolation & drain valve			
Features	•	Robust steel powder coated base, compact size			
	•	AV mounts & Flexible connectors optional			
	•	2 Year Warranty			
	•	Minimum pressure alarm			
	•	Safety start (slow fill mode)			

#### Pump Performance Curve

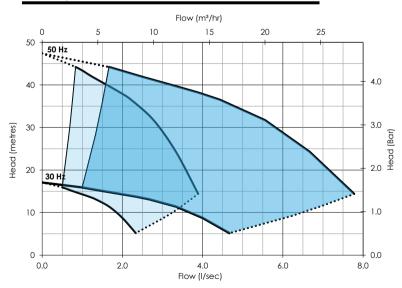

Losses in fittings and valves not included.

Performances shown are for S.G. 1.0 water with a liquid temperature during operation of 20 °C

Pumps are tested in accordance with BS EN ISO 9906:2012 Rotodynamic pumps - Hydraulic performance acceptance tests 
Grade 3B (ISO 9906:2012)







## Specification

Suction connection	2 ½ BSP		
Delivery connection	2 BSP		
Max operating flow (per pump)	3.9 l/s		
Max operating pressure	4.3 bar		
Closed valve pressure	4.6 bar		
Maximum system pressure rating	10 bar		
Speed	Variable		
IP rating	IP55		
Motor power	1.5 kW		
Weight	70 kg		
Pressure vessels N° x [Litres]	1 x [24]		
Maximum system temperature	23 °C		



## **Electrical Data**


## **Model Codes**


Operating speed range	30 - 50Hz		
Per pump Current @ Full Load	8.4 A		
Total Current @ Full Load	16.8 A		
Supply Voltage	230v		
Eleactrical Phase	1Ф		

Range			
# of Pumps	 		
BEP Flowrate (m³/h)	 		
Pump Stages	 	<u>i</u> <u>!</u>	i i
Motor size	 		!
Power Supply			

AH2-0904-015-M

## Technical Drawing

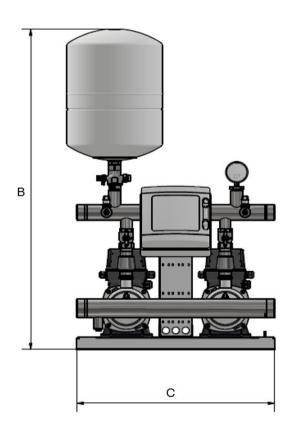

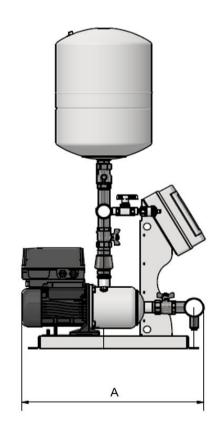

# Drawing dimensions

Dimension A	740		
Dimension B	1055		
Dimension C	600		











