

AV3-0618-022M-MAB

Product Description

The Flowtech AV3-0618-022M-MAB booster set utilises WRAS approved components and features 3 stainless steel multistage pumps mounted on a powder-coated steel base plate. The pumps are operated by our advanced variable speed controller and will deliver a nominal flow rate of 21.3 m³/h (Per Pump) and nominal head pressure of up to 134.8 metres.


Certifications	<ul style="list-style-type: none"> Fully WRAS Approved Kiwa Regulation 4 Approved UKCA Approved CE Approved
Control Panel	<ul style="list-style-type: none"> Controlled by our advanced MAB variable speed control panel Volt free contacts Dry run protection Duty-assist-standby and duty-assist-assist modes
Features	<ul style="list-style-type: none"> 304/316 Stainless steel manifold assembly Suitable for a 1 phase 230V supply Air cooled inverters External low water level facility Pressure vessel with flow through isolation & drain valves Robust steel powder coated base, compact size AV mounts & Flexible connectors optional 2 Year Warranty Minimum pressure alarm Safety start (slow fill mode)



Specification

Suction connection	2"
Delivery connection	2"
Max operating flow (per pump)	1.8 l/s
Max operating pressure	12.1 bar
Closed valve pressure	13.3 bar
Maximum system pressure rating	16 Bar
Speed	Variable
IP rating	IP44
Motor power	2.2 kW
Weight	109.5 kg
Pressure vessels N° x [Total Litres]	1 x [24]
Maximum operating temperature	23°C

Pump Performance Curve

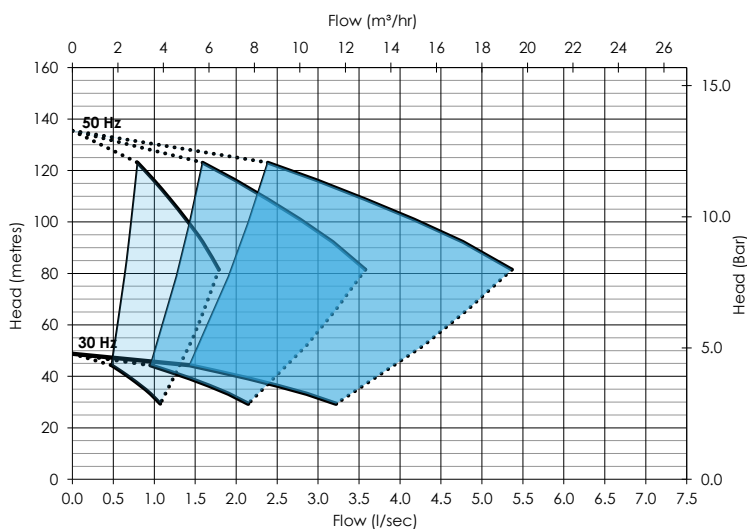

Losses in fittings and valves not included.
Performances shown are for S.G. 1.0 water with a liquid temperature during operation of 20 °C.
Pumps are tested in accordance with BS EN ISO 9906:2012 Rotodynamic pumps - Hydraulic performance acceptance tests - Grade 3B (ISO 9906:2012)

flowtech

Electrical Data


Operating speed range	30 - 50Hz
Per pump Current @ Full Load	11.8 A
Total Current @ Full Load	35.4 A
Supply Voltage	230V
Electrical Phase	1Φ

Model Codes


AV3-0618-022M-MAB

Range	
# of Pumps	
BEP Flowrate (m³/h)	
Pump Stages	
Motor size	
Power Supply	

Technical Drawing

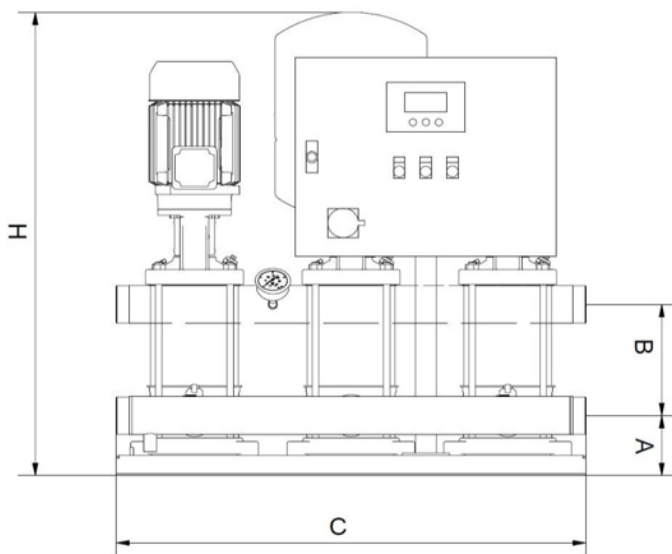

Note: The post is 1000 mm for all models.
ALL DIMENSIONAL DATA PROVIDED IS FOR REFERENCE ONLY AND MAY BE SUBJECT TO CHANGE WITHOUT NOTICE. IT IS THE USER'S RESPONSIBILITY TO VERIFY ALL CRITICAL INTERFACE DIMENSIONS WITH ENGINEERING BEFORE PROCEEDING WITH DESIGN, MANUFACTURING, OR INTEGRATION.

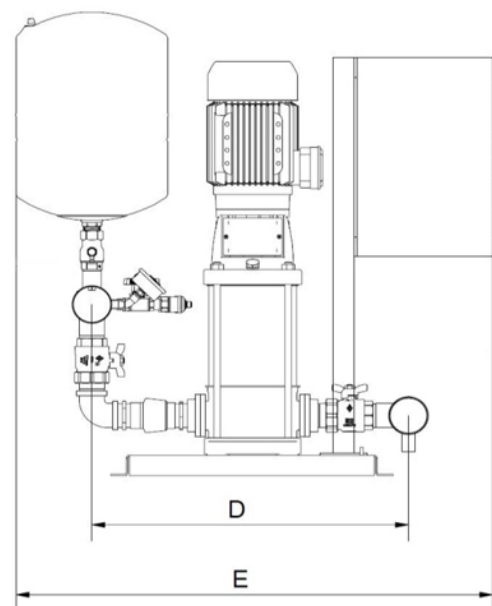

Drawing dimensions

Dimension A	85
Dimension B	180
Dimension C	900
Dimension D	485
Dimension E	850
Dimension H	1047

flowtech

Unit A Quedgeley West Business Park, Gloucester GL2 4PA
flowtech.org.uk | 0333 200 1756 | info@flowtech.org.uk

Document # DOC-17357

Revision: 5

